

## **National Power Corporation**

## **REQUEST FOR QUOTATION** (SHOPPING - 52 .1 b)

July 25, 2022
Sir/Madam:
Please provide us with your best quotation for the items as specified in the Terms of Reference (TOR) for PR No. HO-MSD22-014 Ref. No. SHB 220808 - RG and submit the same at the Bids and Contracts Services Division (BCSD), Ground Floor Diliman Quezon City on Cobefore 9:30 AM of August 08, 2022.  The following documents must be submitted together with your quotation:  For Platinum Members:  1. Valid and Updated Certificate of PhilGEPS Registration (This should include the attache "Annex A"). In case the Mayor's Permit in the said Annex "A" is expired, a valid/update Mayor's Permit must also be submitted.  For Red or Blue Members:  1. Valid Mayor's Permit 2. PhilGEPS Registration Number;  Other documents to be submitted:  In case no bid or insufficient number or bids is received on 08 August 2022, the deadline for submission may be extended, as follows:  First (1st) Extension:
Second (2 <sup>nd</sup> ) Extension :
The RFQ/Bid Proposal shall be submitted by the bidder to NPC on the manner of submission based on the ABC as follows:
Approved Budget for the Contract (ABC)
Up to Php100, 000.00 - via fax/e- mail/ bid proposal to procurement officer
Above Php100,000 up to Php1,000,000 - via Sealed Offer (use drop box @ procurement office)
For further inquiries, please contact the BAC Secretariat, Mr. Renz Gabriel L. Cruz at telephone no/s. 8921-3541 loc 5397 / Fax No. 8922-1622 with e-mail address arenzcruz.napocor@gmail.com.
Very truly yours,

BIR Road cor. Quezon Avenue, Diliman Quezon City 1100, Philippines
Tel. Nos. (632) 921-3541 to 80 • Fax No. (632) 921-2468
Website: www.napocor.gov.ph

AFG-LOG- 004.F01

Rev. No. 0 Page 1 of 1



RENE B. BARRUELA Chairman, Bids and Awards Committee

> Management System ISO 9001:2015



WWW.tuv.com ID 9108656265





## Republic of the Philippines NATIONAL POWER CORPORATION

# TERMS OF REFERENCE ALTERNATIVE MODE OF PROCUREMENT (SHOPPING – 52.1 b)

1. Scope of Works: PRNO.HO-MSD22-014 / REF NO.

For the Supply and Delivery of: VARIOUS MATERIALS AND EQUIPMENTS.

Item No.	DESCRIPTION QTY.		ABC (PhP)
1	FAN ELECTRIC, WALL TYPE EXHAUST, 33W, 230V, 60HZ	10 UNIT	Php 14,000.00
2	HIGH PRESSURE WASHER HIGH PRESSURE WASHER SINGLE PHASE, 220 TO 240V, 60HZ WATER FLOW RATE: UP TO 700 LITERS PER HOUR, WATER PRESSURE: 30 – 100 BAR, HOSE LENGTH: AT LEAST 10M		Php 20,000.00
3	REWINDING MACHINE TRANSFORMER, PORTABLE W/ COUNTER	4 UNIT	Php 24,000.00
4	WIRE, EXTENSION CORD REEL TYPE 6		Php 48,000.00
5	ELECTRIC DRILL HEAVY DUTY INDUSTRIAL USE – 720W, 220VAC, 60HZ 4 UNITS		Php 48,000.00
6	GRINDER ANGLE ELECTRIC – 2200W, 220VAC, 60HZ., COMPLETE WITH WHEELGUARD 4 SET		Php 66,000.00
lotes:	PHP 220,000.00		

## Notes:

- Warranty: Shall be at least Six (6) Months
- Mode of Award is Per Item
- See attached sheet for complete Technical Specification
- Indicate the following Terms and Conditions on the Bid Quotation:
  - Payment Terms
  - Delivery Period
  - Price Validity
  - Delivery Point
  - Warranty

## APPROVED BUDGET FOR THE CONTRACT: PHP 220,000.00

## 2. Delivery Period

Delivery Period shall not be later than **Twenty (20) calendar days** upon receipt of the Purchase Order / Notice to Proceed.

## 3. Delivery Point

Items shall be delivered at NPC MRMD - Brgy. Buli Muntinlupa City.

### 4. Bid Submission

The Bidder shall submit their bids through their authorized representative or in the manner of submission as prescribed in the RFQ.

### 5. Late Bids

Any Bid submitted after the deadline for submission and receipt of Bids shall not be accepted by NPC.

### 6. Bid Prices

The bid price as indicated in the Quotation Form shall be fixed during the Bidder's performance of the Contract and not subject to variation or price escalation on any account. A Bid submitted with an adjustable price quotation shall be treated as non-responsive.

## 7. Bid Price Validity

Price Validity shall not be less than One Hundred Twenty (120) calendar days from date of bid submission.

## 8. Eligibility Criteria

- a. Bids shall be checked using the PASS / FAIL Criteria for Legal, Technical and Financial components.
- b. From the bids that were rated PASSED, the same shall be ranked and corrected for computational errors to identify the Lowest Calculated Quotation (LCQ).

## 9. Detailed Evaluation and Comparison of Bids

The LCQ shall be subjected to detailed evaluation against the Technical Specifications including arithmetical computations. Documents which are deemed not to comply with the requirements of the tender shall be considered non-complying.

## 10. Post-qualification

Submitted documents of the LCQ shall be subjected to post qualification evaluation.

PhilGEPS Certification and Mayor's/Business Permit.

The bid that PASSED the Post-Qualification shall be declared as the Lowest Calculated Responsive Quotation (LCRQ).

## 11. Total Contract Price

The Total Contract Price shall be inclusive of all taxes and other related expenses / charges.

## 12. Notice to Supplier

- The supplier shall pick-up the Purchase Order (PO)/ Notice to Proceed (NTP) from NPC within two (2) calendar days from receipt of the Notice of Award.
- b. Failure to secure the PO/NTP by the supplier within the said period will mean cancellation of the same and imposition of penalties as prescribed by law.

## 13. PO Effectivity

a. The PO Shall take effect immediately upon receipt of the PO / NTP by the supplier sent through fax as evidenced by the fax transmission receipt and as confirmed by the supplier's representative.

## 14. Terms of Payment

Terms of Payment shall be thirty (30) calendar days after submission of complete supporting documents.

## 15. Warranty

Warranty is dependent upon the nature/type of the item which is included in the offer (i.e. Manufacturer's Warranty).

## 16. Liquidated Damages

Where the supplier refuses or fails to satisfactorily complete the work within the specified contract time, plus any time of extension duly granted and is hereby in default under the contract, the supplier shall pay NPC for liquidated damages, and not by way of penalty, an amount equal to at least one tenth (1/10) of one percent (1%) of the cost of the undelivered/unperformed portion of the items/works for every day of delay. Once the cumulative amount of liquidated damages reaches ten percent (10%) of the amount of the contract, the procuring entity may rescind or terminate the contract, without prejudice to other courses of action and remedies open to it (Section 68 of the Revised IRR of RA 9184).

## 17. Liability of the Supplier

If after receipt of the Purchase Order, the supplier fails to deliver the goods, appropriate sanctions will be imposed as prescribed under Republic Act (RA) 9184 and its Revised Implementing Rules and Regulations (IRR).

### 18. Disclosure of Relations

The bidder shall comply with the provisions of Section 47 of RA 9184 and its revised IRR re: disclosure of relations.

## 19. Administrative Sanctions

Bidder shall likewise be imposed the rules as stated in section 69 (Imposition of administrative penalties) should there be infractions committed.

## 20. Reservation Clause

NPC reserves the right to accept or reject any bid, to annul the bidding process, and to reject all bids at any time prior to contract award, without thereby incurring any liability to the affected bidder/s.

-----remaining spaces are intentionally left blank ------

## SUPPLIER'S BID QUOTATION (SHOPPING 52.1 b)

To: The BAC Chairman:

I have read and examined the Terms of Reference for Purchase Requisition (PR) No/s. **HO-MSD22-014**. I agree with the conditions of the TOR and offer the following supplies with specific description:

NO.	DESCRIPTION OF ITEM / S TO BE SUPPLIED (INCLUDE BRAND NAME)	QTY	UNIT PRICE (PhP)	TOTAL PRICE (PhP)
<u> </u>				
			<del></del>	
	TOTAL BID PRICE			

Name and Signature of Authorized Representative  Date				
Company Name				
Contact Details				
e-mail address				

Note: The bidder may use this form or its own company letter head following this format duly signed by the authorized representative when making the offer.

## PR NO. HO-MSD22-014

## 1. FAN ELECTRIC, WALL MOUNTED EXHAUST

- 100% pure copper motor, anti-vibration mounting, equipped with thermal fuse, self-lubricating motor, reduced noise, light weight, weather resistant casing, conforms to local and international safety and quality standard

Plastic Blade Size: 8 inches blade

Cutout Size: 24.5x24.5cm

Size: 30x12x30cm

Voltage: 230V, Frequency: 60Hz


Power: 33W

Airflow: 8.1m^3/minNoise Level: 50dB

With front panel blade cover and Electrical Male Plug Included


Warranty type: 6 Months Warranty

## **SAMPLE PHOTO**

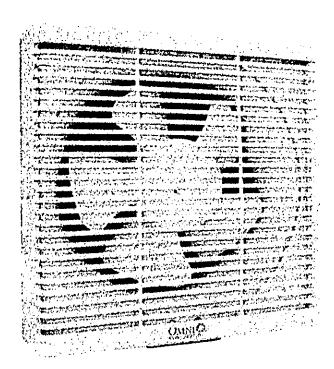

## 2. PRESSURE WASHER

- Pressure Washer with a maximum pressure of 140 bar and a water flow rate of  $5.5 \pm 0.4$  L/Min. to easily deal with obstinate dirt and stains.
- Compact, versatile for easy transport and mobility.
- High-performance machine with high-quality N-Cor pump to reduce noise.
- Efficiency Label
- A large on/off switch, smooth-running wheels.
- Working pressure: 95±5 Bar
  Maximum pressure: 140 Bar
  Working flow: 5.5 ± 0.4 L/Min.
  Power Consumption: 1800W
- Operating voltage: 220 Volts, 60 Hz
   Pressure hose length: 5 meters
- Trigger Gun Handle
- Trigger Gun Wand (2 types)
- Gross Weight: 11.5KgNet Weight: 10 Kg
- 3 Axial-piston wobble plate pump
- Tempered stainless steel plungers
- Total auto-stop System
- Built-in thermal protector
- Capable of using warm water up to 50°C (122°F).
- With hose reel organizer.
- With wheels and handle for easy movement
- With 4Li Car Wash Liquid Detergent
- Includes pressure hose water outlet and connector.
- Includes 15 meters garden hose with hose reel with connector (faucet and washer connector)
- Garden Hose (Heavy duty with three distinct layers to ensure greater resistance: PVC fiber inside and outside, and with a layer of braided polyester cord).
- With Car Wash Microfiber Sponge (2pcs), Microfiber towel (4pcs) and Chamois towel (2pcs)
- · With Socket adapter if round end
- Warranty type: 6 Months Warranty





## 3. REWINDING MACHINE - DIGITAL DISPLAY MANUAL REWINDER

## **GENERAL DESCRIPTION & SPECIFICATIONS:**

• Hand rewinder machine.

Model: NZ-1

• Speed: 0~2000r/min

• Count Range: 0~99999round

Maximum diameter that can be wound around

• The coil: 150mm

Maximum length of coil that can be wound:100mm

Transmission ratio: 1: 8


• Product size: 290x100x180mm

Weight: 3.5kg (apprx.)

• All gear are made of metal.

• Dimension (L x W x H):290x100x180mm (apprx.)

Warranty: 6 Months

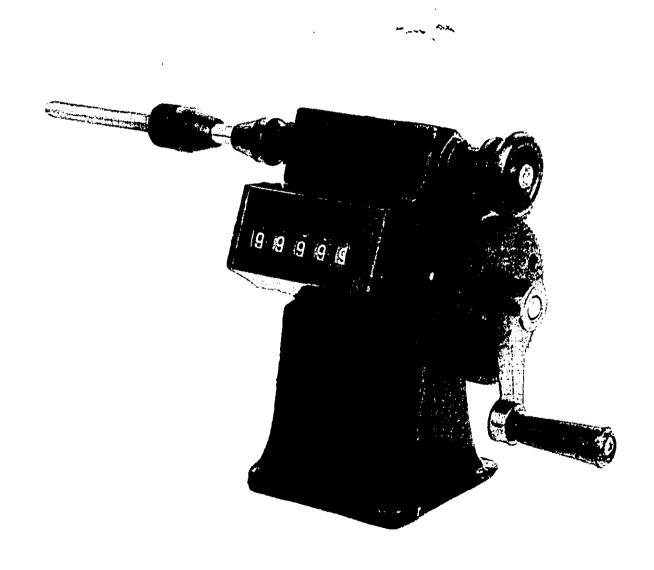

## 4. EXTENSION CORD - EXTENSION WITH REEL

## **GENERAL DESCRIPTION & SPECIFICATIONS:**

• Extension Cord w/ Reel, reel stand and reel holder.

• Cable Length: 100ft / 30meters


Voltage: 220vMax Amp.: 30AHertz: 60Hz

Universal socket outlets

No. of socket outlet: at least 3pcs

• With breaker switch

## **SAMPLE PHOTO:**

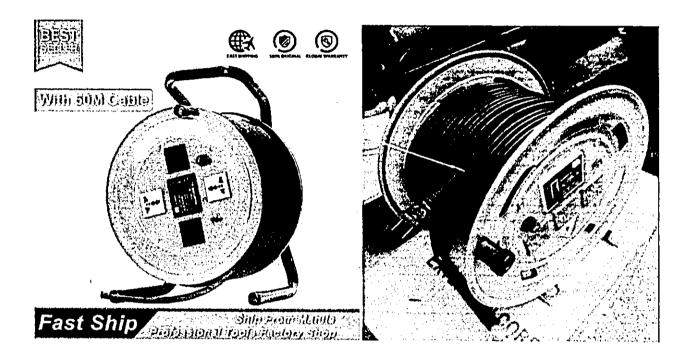

## 5. ELECTRIC DRILL - HEAVY DUTY, INDUSTRIAL USE.

- At least 720W @ 220Vac, 60Hz
- Socket Adapter if round end
- Hard Case Included
- Drill Bits Set

## **GENERAL DESCRIPTION & SPECIFICATIONS:**

### HIGHLIGHTS:

- Continuous rating input: 720 W
- Capacity on steel (High): 8 mm (5/16")
- Capacity on steel (Low): 13 mm (1/2")
- Capacity on wood (High): 25 mm (1\*)
- Capacity on wood (Low): 40 mm (1-9/16")
- No load speed on high: 0 2,900 rpm
- No load speed on low: 0 1,200 rpm
- Dimensions : 34.7 cm x 7 cm x 22 cm (13-5/8" x 2-3/4" x 8-5/8")
- Not weight: 2.3 kg (5 lbs)
- Power supply cord: 2.5 meters (8.2 feet)

### **DESCRIPTION:**

- High speed and high efficiency.
- Sturdy aluminum gear housing.
- Extra rigid cylindrical housing.
- Ergonomically designed handle with rubberized soft grip.
- Built-in torque limiter helps prevent kickback.
- Reverse rotation feature
- Double insulation

### SPECIFICATION:

A STATE OF THE PROPERTY OF THE STATE OF THE PROPERTY OF THE STATE OF T	
Continuous rating input	The state of the s
The state of the s	2000 M 12-12-12-12-12-12-12-12-12-12-12-12-12-1
	Shed Let
	Wrood HI:
જ્ઞાનુક પંતાસકાર કે જેવા જેવા છે. જે કે જોઈ હતી છે છે હતી છે	A CONTROL OF THE CONT
and the second second second	Mod (n. (1-a/16)
การคราชาติสาราชาวิทยาลักษณะเมื่อสาราชานิก	사람들은 보통하는 사람들에 대한 사람들은 사람들이 가장 하는 것이 되었다. 그는 사람들은 사람들은 사람들은 사람들은 사람들은 사람들은 사람들은 사람들은
·····································	e-quocpin
No load speed	
	(O-1,200-pm)
-data-angligisa di Marine Bergelanda (1992) ang Marine ang Marine ang Marine ang Marine ang Marine ang Marine Na nanang tanggan ang Marine ang	THE THE PROPERTY OF THE PROPERTY AND THE
Dimensions (LxWxH)	\$47mm x 70mm x 220mm
And the first of the state of t	(13-6)(* : 2-3)(* : 0-5)(*)
या अन्य पुत्र क्षेत्र के विश्व के किया है	
Het weight	
and the said of the production of the said	CONTROL OF THE CONTRO
Power typply and	28m (6.2m)
ing the standard and a solid standard standard from	<del>的复数形式的现在分词形式的现在分词形式的现在分词形式的影响,这个人的影响,不是一个人的影响,不是一个人的影响,不是一个人的影响,不是一个人的人的人</del> 的人,就是一个人

## **ACCESSORIES:**

· Drill Bits Set in Casing

## **Drill Bit Specifications:**

- HSS-G Metal drill 3,4,5,6,8,10mm
- Wood 3,4,5,6,8,10mm
- Masonry drill for brick 3,4,5,6,8,10mm


#### HIGHLIGHTS:

- Sizes included (mm) 1, 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.6, 7, 7.5,
- 51203 MC10000 (MM) 1, 1.0, 2, 2.0, 5, 5.2, 5.0, 4, 4.5, 4.6, 5, 5.5, 6, 5.6, 7, 7,0
- Point Angle ~ 118°
- Standards DIN 338
- Bit Geometry Standard Twist Bit
- · Roll forged HSS Drill Bit
- Makita HSS-R Drill Bit: 1mm 13mm
- Made by die-casted rolling machine
- Stored in a metal box

### PRODUCT FEATURES:

- Suitable for drilling steel up to a tensile strength of 900 N/mm², non-forrous metals, cast iron, hard plastics etc.
- High rotational precision.
- · Right-hand cutting twist drill bit.
- Shank equal to drill bit diameter.

## **SAMPLE PHOTO**

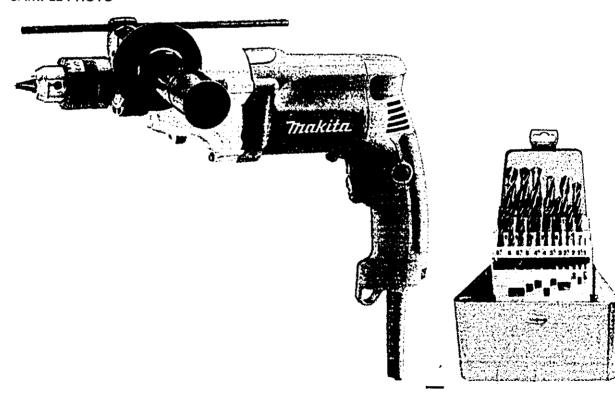

8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13

## 6. ELECTRIC GRINDER - For heavy duty applications. Grinder 7" Capacity.

- 2200W @ 220Vac, 60Hz
- Socket Adapter if round end
- Hard Case Included
- Grinding and Cutting Disc included

## **GENERAL DESCRIPTION & SPECIFICATIONS:**

#### HIGHLIGHTS:

- Developed for heavy duty applications such as foundry grinding
- Motor more durable for heavy duty applications
- Design of anti-layer short of armature
- Rigid, low-absorbent motor housing to reduce water absorption
- Adoption of spiral spring type brush holders yet with a compact body
- Compact dosign at only 450mm (17-3/4\*) long
- Lightweight for high production work with less fatigue
- Switch cover and sponge minimize entering of motal particles to switch terminals to improve the protection against electric leakage
- Newly designed side handle provides more comfort and control
- Nowly designed shaft lock enables to press the button from a slant angle
- Protection of serial No. label with a transparent portion of brush holder cover
- . Powerful 2,200 W motor delivers 8,500 RPM for the most demanding applications
- Anti-restart function minimizes accidental start-up even if the tool is plugged to power source with the switch ON
- · Soft start minimizes start-up shock and makes the tool start smoothly
- Spiral bavel goars for smoother rotations, quieter goar noise and a more afficient transfer of energy
- Three position adjustable side handle for operator convenience
- · Soft grip provides increased comfort on the job
- · Large trigger switch for easy operation
- · Lock lever for continuous use operation (For tool with Lock-on switch).
- Lock-off safety lever minimizes accidental start up (For tool with Lock-off switch).
- . Whool cover protects operator from accidental scattering of broken whool or workplace with minimal wheel cover movement.
- Long brushes for longer service life. Externally accessible brushes for greater serviceability. Double insulated for operator safety.
- Can be connected to dust extraction system with optional dust-collecting wheel cover.

INCLUDES:

Side Grip, Wheel Cover, Lock Nut Wrench

SPECIFICATIONS (NEXT PAGE)

## SPECIFICATIONS:

Continuous rating input

Wheel Diameter

No Load Speed (RPM)

Vibration Level

Vibration K Factor

Vibration Level

Vibration K Factor

Vibration Level

Vibration K Factor

**Vibration Level** 

**Vibration K Factor** 

Sound Pressure Level

Sound Power Level

Noise K Factor

Dimensions (L x W x H)

Net weight

2,200W

180 mm (7°)

8,500

Surface Grinding w/ Anti-Vibration Side Grip: 7.5 m/s<sup>2</sup>

Surface Orinding w/ Anti-Vibration Side Grip: 1.5 m/s<sup>2</sup>

Surface Grinding w/ Normal Side Grip: 7.5 m/s<sup>2</sup>

Surface Grinding w/ Normal Side Grip: 1,5 m/s\*

Disc Sanding w/ Anti-Vibration Side Orip: 2.5 m/s<sup>2</sup>

Disc Sanding w/ Anti-Vibration Side Grip: 1.5 m/s<sup>2</sup>

Disc Sanding w/ Normal Side Grip: 2.5 m/s<sup>2</sup>

Disc Sanding w/ Normal Side Grip: 1.5 m/s<sup>2</sup>

91 dB(A)

102 dB(A)

3 dB(A)

450 x 200 x 144 mm (17-3/4 x 7-7/8 x 5-5/8")

5.42 - 5.93 kg (12 - 13.1 lbs.)

## **ACCESSORIES:**

• 7" Grinding Disc – 10 pcs

• 7" Cutting Disc – 20 pcs

